



9225 - Multi-Tank Monitoring Solution



This exceptionally reliable, low-cost tank monitoring solution has a powerhouse of features, including:

1. Remote level information at your PC for up to five tanks, via cellular transmission.
2. Live data on a digital display panel, for local readings.
3. Alerts when your fluid gets too low or your tank gets too full, for better product management. (Optional alert if AC power fails.)
5. Sends e-mails, voice or text messages when product needs to be filled or emptied.
6. Reconfigure from the Web or from the local display panel.
7. No electronics in the tank, for maximum safety and reliability.



2063 S. Edwards St.
Wichita, KS 67213
www.LevelDevil.com



Electronic Sensors, Inc.

Toll Free: (800) 886-2511
Phone: (316) 267-2807
Fax: (316) 267-2819

9225 Multi-Tank Monitoring Solution




How it works for you

The *Lil'Devil II*TM monitoring unit is designed to be installed quickly and easily in a wide variety of locations for use with vented, non-pressurized bulk tanks containing non-volatile fluids: motor oil, industrial lubricants, antifreeze, water, cleaning fluids, agricultural chemicals, concrete additives, slurry solutions, etc.


*Lil'Devil*TM is a "bubbler" system: When instructed to read the tank level, the monitoring unit pumps air through the tube and measures the pressure required to force air bubbles out through the open end of the tube at the bottom of the tank.

The *Lil'Devil II*, uses fluid, tank size, and geometry data stored in the unit to calculate the actual gallons remaining in the tank. The height and volume values are displayed on the local display and sent to the datacenter, by cellular telecom signal, for further processing. Alerts and notifications may be sent – using email, fax, voice, or text messages – to as many devices are needed.

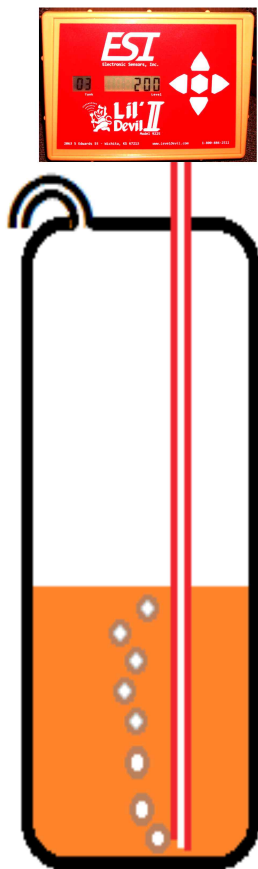

Specifications

Monitoring Capacity	1-5 Tanks
Max Tank Height	18 feet
Tank Type	Vented, Non-pressurized
Local Display	[Tank #] & [Gallons / Inches]
Accuracy	Better than 1% of span
Power Source	120VAC @ less than 1amp.
Special Alerts	AC power loss (optional)
Communications	Cellular: LTE
Tank Port	1/4-inch O.D. plastic tubing
Unit Mounting Location	Inside, out of weather
Distance from Tank	1,500 feet max.
Weight	2.6 lbs.
Dimensions	9"W x 6"H x 4"D

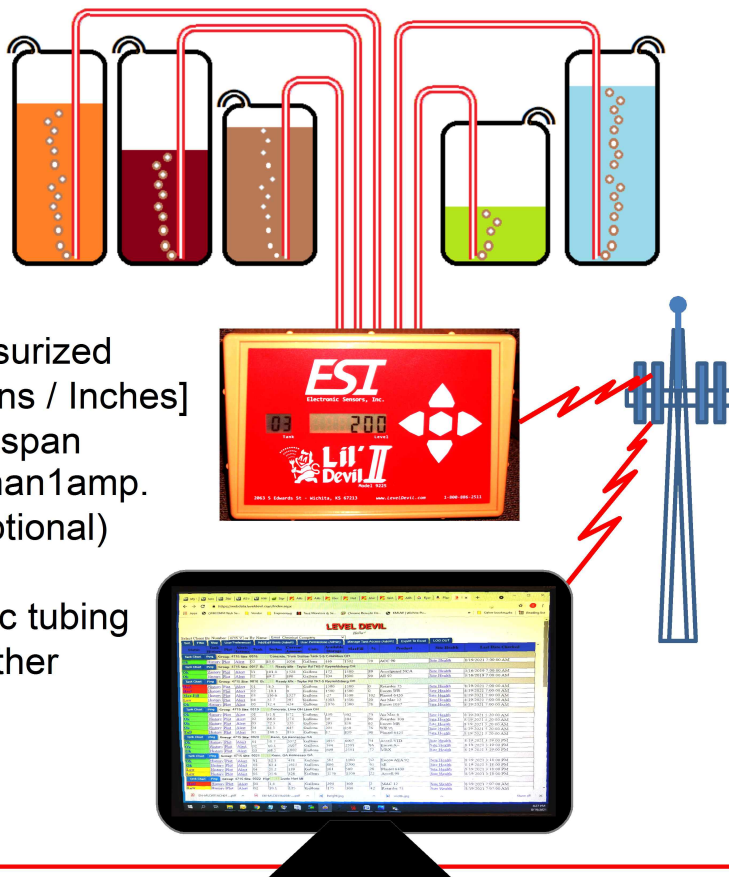

For more info:
LevelDevil.com

9225-Aug2021b

